

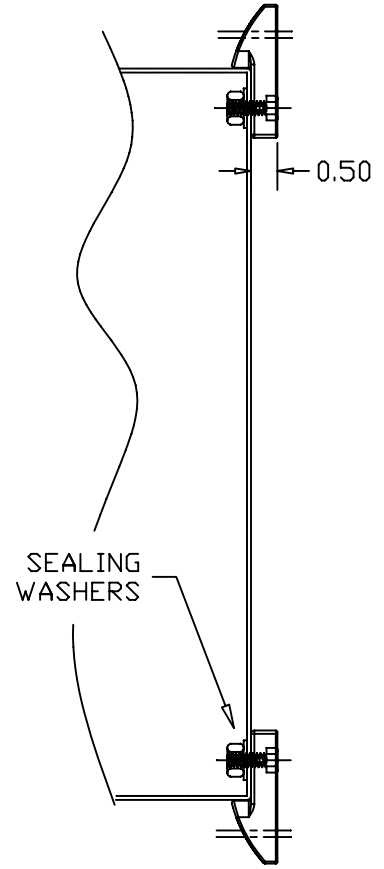


MOUNTING FOOT KIT FOR EL ENCLOSURES

SCE-ELMFK4, SCE-ELMFK4S

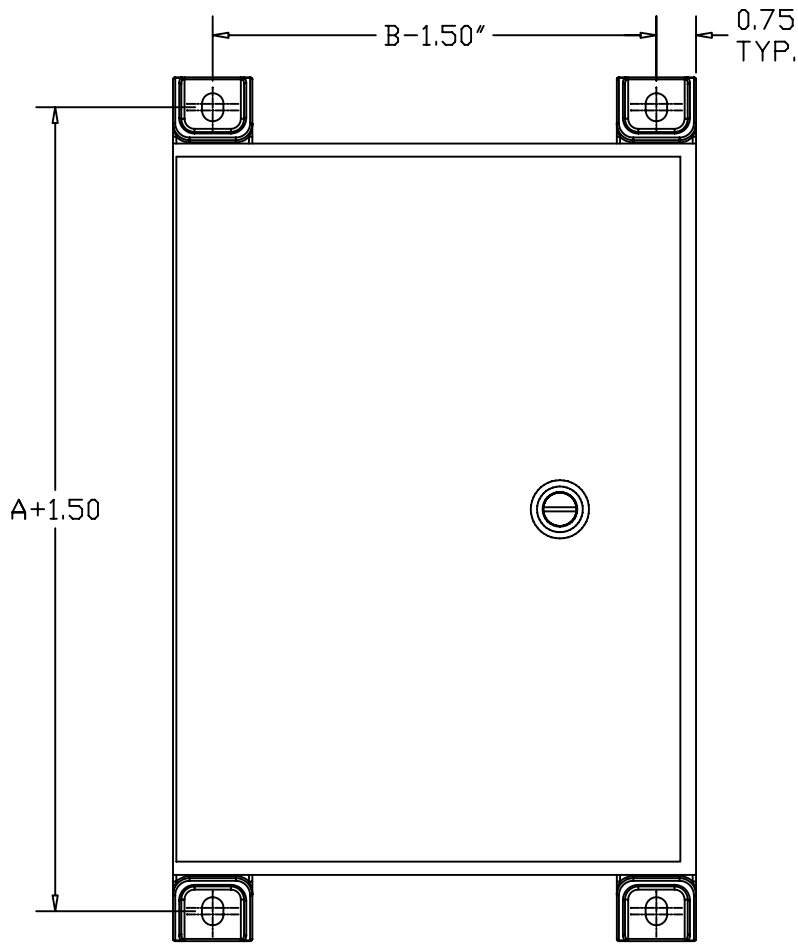

SIDE VIEW

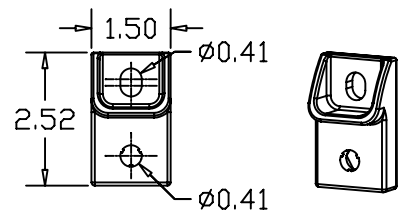


$\frac{3}{8}$ -16 x .75 HEX BOLT INCLUDED

Performance Characteristics 33% Glass Reinforced Nylon (Polyamide 66)	
Acetic Acid (Diluted)	Little Effect
Antifreeze	No Effect
Break Fluid	No Effect
Chlorine Water	Little Effect
Citric Acid (Diluted)	Little Effect
Cold	-40F
Corrosion Resistance	Excellent
Dark Cutting Oil Cutting Fluid	No Effect
Gasoline	No Effect
Heat Resistance	>300F
Impact	Excellent
MEK	No Effect
Melting Point	504F
Motor Oil	No Effect
Sea Water	No Effect
Sulfuric Acid (Diluted)	Little Effect
UL 94	V-2
UV Resistance	Excellent
Weather Resistance	Excellent
Xylene	No Effect
Maximum Recommended Load	
SCE-ELMFK4	900 Lbs.
SCE-ELMFK4S	900 Lbs.

Windchill Reference Drawing

Drawing: ELMFK4.DWG



SAGINAW CONTROL AND ENGINEERING
 95 MIDLAND ROAD
 SAGINAW, MICHIGAN 48638
 PHONE 989-798-6871
 FAX 989-798-4524